




MATERIAL DATA SHEET

BRAIDS

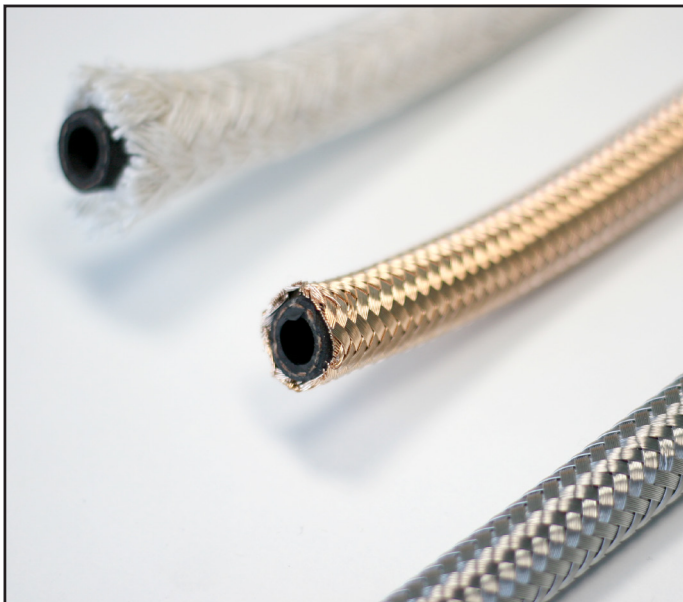


We provide your hoses with so-called reinforcement braiding.

State-of-the-art machines provide for trouble-free braiding, a diminution of the inner diameter is avoided with reasonable hose strength. Our standards have proved themselves over decades.

We offer you braids with galv. steel wire (thickness 0.30 mm and 0.24 mm), glass fiber (E-glass), ceramic fiber, stainless steel wire (thickness 0.30 mm/ quality 1.4571) cotton and phosphor-bronze wire. Combinations, such as e.g. glass fiber + stainless steel wire, are also possible.

According to material, we braid up to an outside diameter of 90 mm (stainless steel wire). Please contact us.

The delivery of the hoses is implemented free of charge to the given address, Collection ex-works!

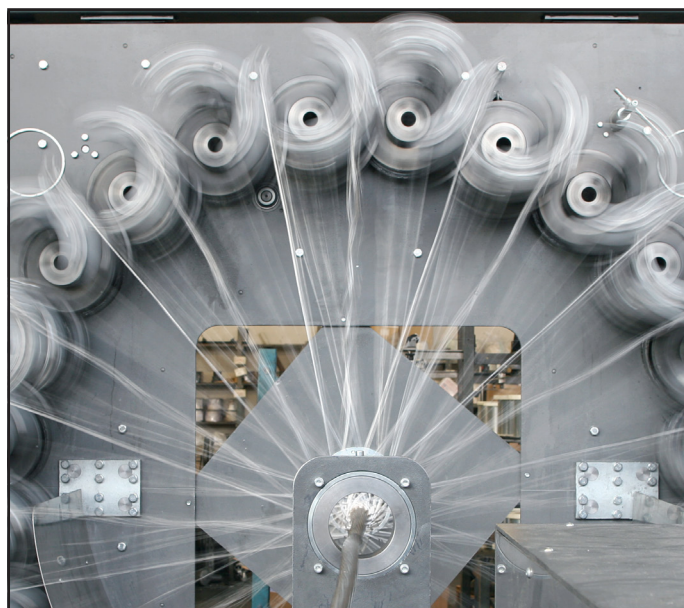

MATERIAL COMPOSITION:

Braiding of hoses with: Glass fiber, ceramic fiber, cotton, galvanized steel wire, stainless steel wire and phosphor-bronze wire

Since all parameters indicated in this catalog represent only rough values concerning characteristics, specification and applications, and can influence each other mutually, the specific application in each case should not be carried out without independent testing and evaluation. All technical information and recommendations are based on experience acquired to date.

Errors on the selection of sealing can lead to damage. Specifications concerning characteristics, specification and applications are implemented subject to unannounced future changes.
RUHRLAND STOPFBÜCHSEN PACKUNG GmbH does not assume any liability of any type.