




## TYPE 29

## COTTON-GRAPHITE-STEAM-PACKING

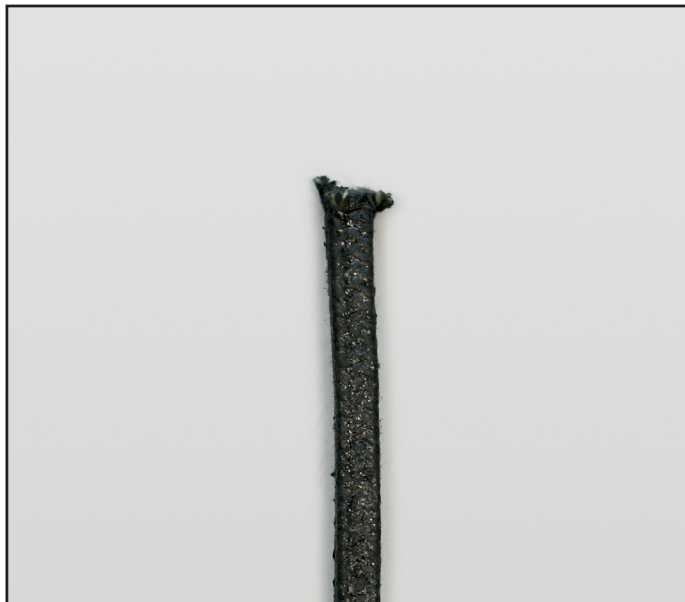

### APPLICATION AREAS:

Pumps, turbines, valves, hydraulic, spindles, mixers and agitators

### APPLICATION MEDIA:

Water, waste water, sea water, mineral oils, animal greases, oils and greases, diluted solutions and dilute alkalis.

### NOT SUITABLE FOR:

Acidic and abrasive media.

Also available as Liliput packaging 12 mm sq.

### MATERIAL COMPOSITION:

Cotton-graphite-steam packing = cotton packing with grease/  
graphite impregnation

### PROPERTIES:

Packing in favorable price range for small requirements.

TEMP	- TEMP	+ TEMP	STEAM
°C	- 20 °C	+ 120 °C	-

pH	DENSITY
6-8	1,5

PRESSURE	ROTATING	RECIPROCATING	STATIC
BAR	10	20-60	-

V	M/S
-	10

Since all parameters indicated in this catalog represent only rough values concerning characteristics, specification and applications, and can influence each other mutually, the specific application in each case should not be carried out without independent testing and evaluation. All technical information and recommendations are based on experience acquired to date.

Errors on the selection of sealing can lead to damage. Specifications concerning characteristics, specification and applications are implemented subject to unannounced future changes.  
RUHRLAND STOPFBÜCHSEN PACKUNG GmbH does not assume any liability of any type.